

447B

SAFETY VALVE FEMALE CONNECTION (SIZES FROM 1" 1/4 TO 2")




TECHNICAL SPECIFICATIONS

DESIGNED FOR NOT DANGEROUS GAS, VAPOURS AND LIQUIDS

PRESSURE SETTING:	FROM 0 TO 10 BAR
MAX PRESSURE:	10 BAR
OVERPRESSURE:	10% OF THE CALIBRATION PRESSURE
RESEATING PRESSURE :	20%
WORKING TEMPERATURE:	0-110°C



MATERIALS

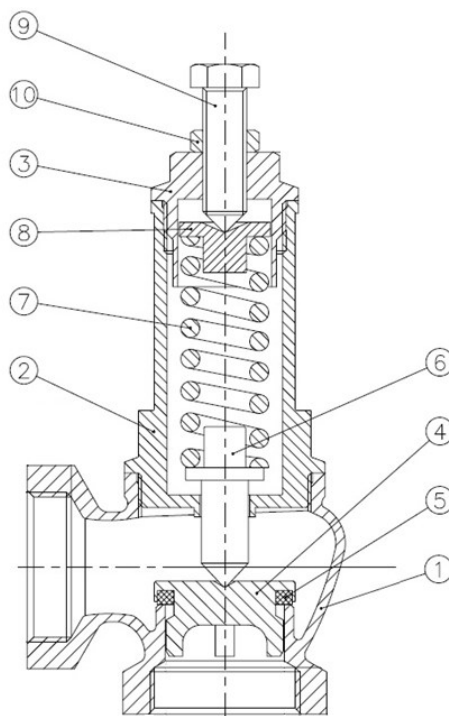


POS.	DESCRIPTION	N.	MATERIAL
1	BODY	1	BRONZE UNI 7013
2	HEAD SCREW	1	BRASS CW617N
3	CAP	1	BRASS CW617N
4	SHUTTER	1	BRASS CW617N
5	GASKET	1	SBR 70
6	PISTON	1	BRASS CW614N
7	SPRING	1	STEEL
8	SPRING CAP	1	BRASS CW614N
9	ADJUSTING SCREW	1	BRASS CW614N
10	NUT	1	BRASS CW614N



OVERALL DIMENSION

SIZE (D)	H	h	L
1" 1/4	191	45	54
1" 1/2	207	47	60
2"	233	60	72

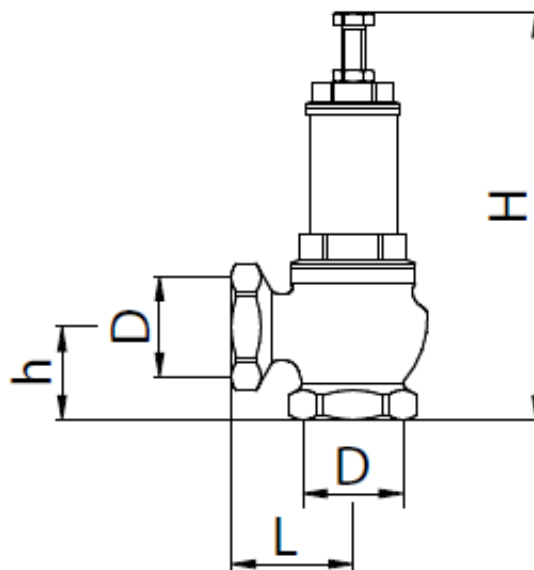

NOTE:

WITH REFERENCE TO THE PRESSURE EQUIPMENT DIRECTIVE (PED) 97/23/EC REGULATING PRESSURE EQUIPMENT, THAT SAFETY VALVES ARE DESIGNED TO PROTECT ONLY PRESSURE EQUIPMENT AND ASSEMBLIES, THAT DUE TO THEIR DESIGN CONDITION, COMPLY WITH ARTICLE 3.3.

THIS IS THE REASON WHY OUR SAFETY VALVES DO NOT HAVE TO BEAR THE CE MARKING, WHILST IN OTHER CASES THE MARKING IS MANDATORY.